


Cable Protection Option:

Protection Hose, Hose Gland, and
Hose Clamp

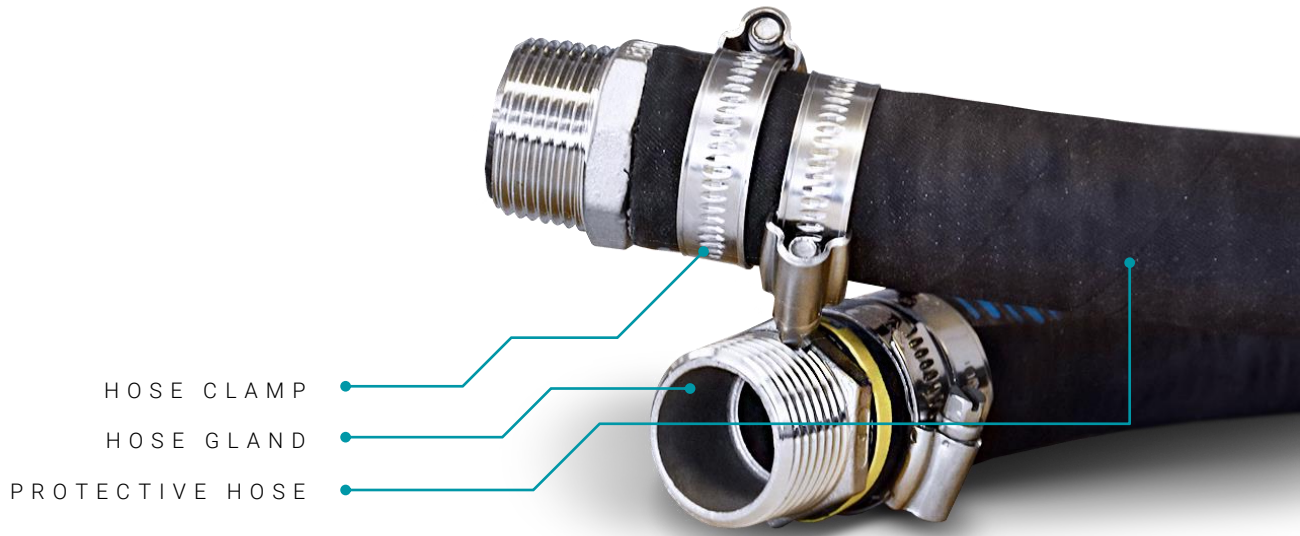

Cable Protection Option

A cable protection option is available to ensure the IP class of the slip ring. Depending on application and space requirements in the installation, different protection options are available. Consult with Penlink at order of your slip ring. Specify the length of the cables and cable protection separately. The picture shows Penlink standard cable protection.

Construction of the Cable Protection

Our protection is made from EPDM in both outer and inner part of the tube with embedded spiral.

The protection is very flexible. The exterior have a black weave patterned with blue marking, LM marine water house, and the inside is black and smooth.

Specifications

Operational Temperature	40°C - +120°C
Inner Diameter	ø25mm
Outer Diameter	ø35mm
Max. Working Pressure	0,6Bar
Min. Bending Radius	100mm
Weight	0,72kg/m